

TUUCI®

made in miami



Flush Mount In-ground 1.5" pole installation instructions

global mission control

2900 NW 35th Street, Miami, FL 33142 USA | 305.634.5116 | info@tuuci.com | www.tuuci.com

Note: This operation may require 2 people.



For pool application (grounding lug) refer to page 5.

Step 1.

Sketch diagram for drilling.

Step 2.

Using a core bore drill (recommended) create core per diagram.

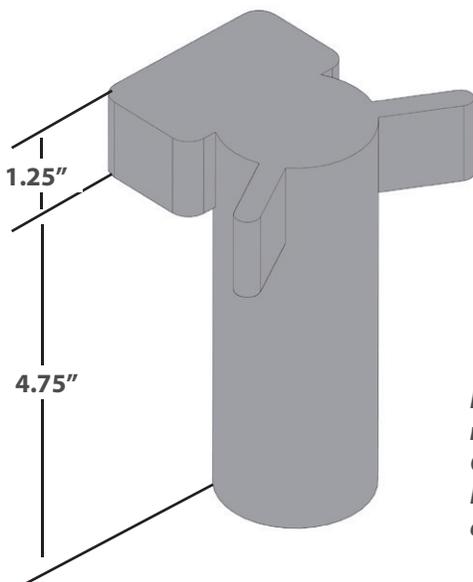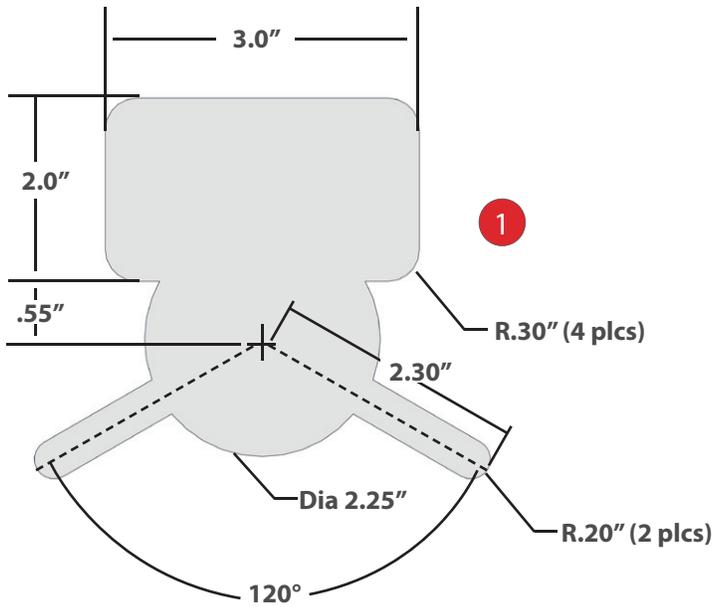

Note: Additional depth may be required for ground wire. Consult with electrical contractor. Reference page 5 grounding lug for detailed instructions.

hardware


DESCRIPTION	QTY	
flush mount	1	
extension pole	1	
hitch pin	2	
3/8-16 drop in anchor	3	
3/8-16 flat head SS screw	3	




2
core bore drill

Note: This operation may require 2 people.


Step 3.
Insert flush mount and mark the 3 pattern holes.

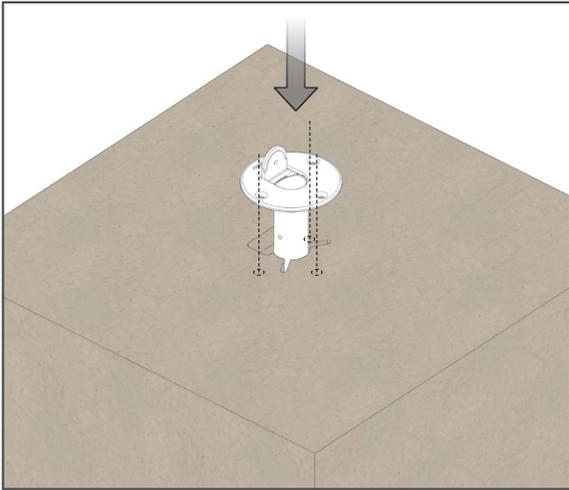


Step 4.
Drill pattern holes using a Ø1/2" drill, 1.8" deep.

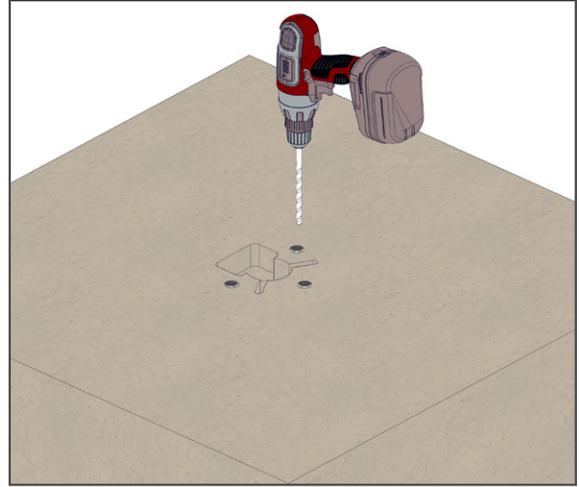


Step 5.
Insert drop-in anchor into holes. Use Ø.1/4" spike hammer to pound and spread anchor securely in the hole

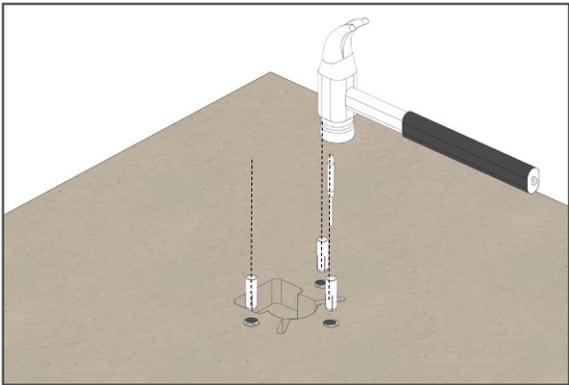

Step 6.
Install flush mount and secure with 3/8-16" flat head stainless steel screws.

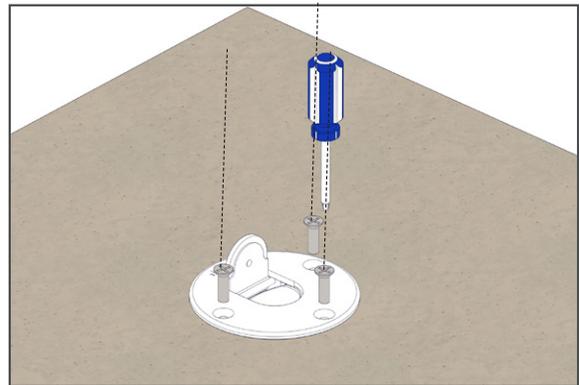


Step 7.
Insert extension pole and secure with hitch pin.

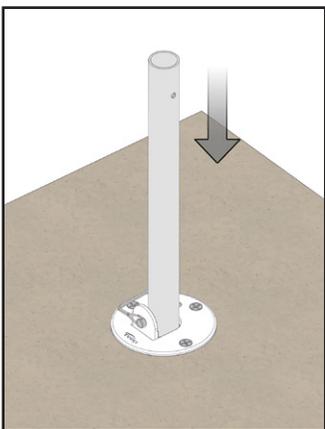

Step 8.
Before drilling through the hole, ensure the umbrella canopy is oriented in correct position. Drill the hole using a Ø17/64" drill bit.



Step 9.
Secure the umbrella with hitch pin.

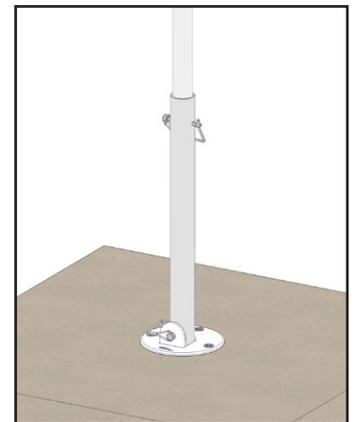

INSTALLING FLUSH MOUNT IN POOL APPLICATION (With Ground Lug option)

1. Loosen ground lug screw
2. Insert grounding wire into ground lug terminal and tighten .
(max wire size 2 AWG)
3. Resume installation steps to install stainless steel flush mount .

